



Simply working

NEW!

(available July 2012)



Capanivo[®] 4000

Capacitive level limit switch

Precise and reliable capacitive limit detection,
constant even with varying material properties.
Certified for Hazardous Locations (Dust Ex).

Capanivo[®] 4000



- Simple setup with no further adjustment necessary
- Maintenance-free, corrosion resistant, wide application range
- Versatile extensions and high temperatures (180° C)

Application:

Capanivo[®] 4000 is certified for all solids applications with variables including high temperature, high pressure and material residues such as flour, grain, cement, granulate, carbon black.

CN 4020

Full, demand, empty detector
Installation vertical, horizontal and oblique, also with limited space



CN 4020 / 180° C

Full, demand, empty detector
Installation vertical, horizontal and oblique




CN 4030

Full, demand, empty detector
Design with pipe extension, vertical installation, sliding sleeve option



CN 4050

Full, demand, empty detector
Design with extension cable up to 6 m, vertical installation

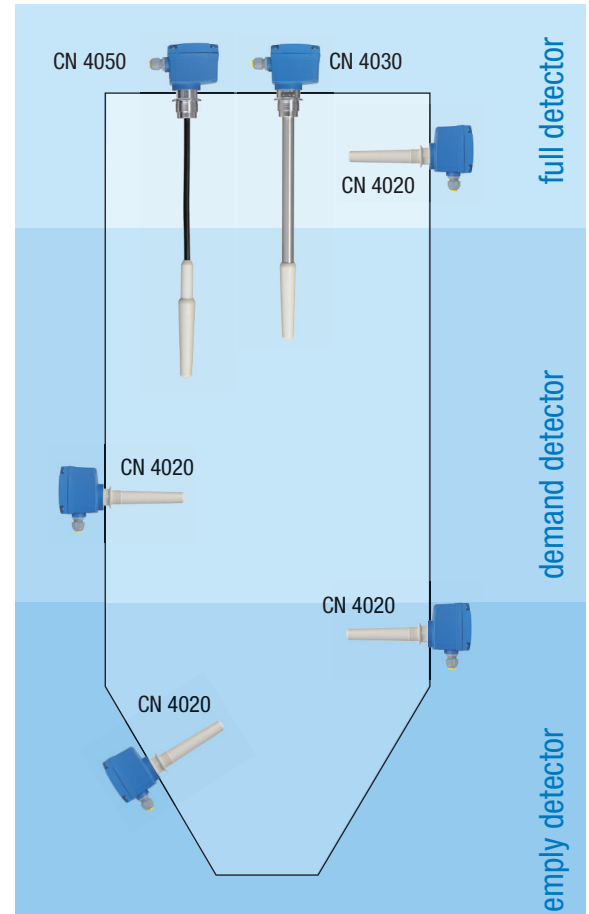

Technical Data

Housing	Plastics PA6 or Aluminum
Certificates	ATEX I/II IEC-Ex t IIIC Da/Db
Process temperature	- 40°C to + 180°C - 40°F to + 356°F
Pressure	- 1 .. +16 bars (- 14,5 .. + 232 psi)
Sensitivity	DK value >= 1,6
Supply voltage	21.. 27V DC Relay SPDT 21.. 230V AC/21..45V DC Relay DPDT 20.. 40V DC PNP +/-10%
Process-connection	G 1", G 1 1/2"

Simply working

UWT GmbH · Westendstr. 5
87488 Betzigau · Germany

Phone: +49 (0) 831/57 123-0
Fax: +49 (0) 831/76 879

www.uwt.eu
info@uwt.eu